

IRU-9400 Self Contained Ultrasonic Level Sensor




Flexible by Design

The IRU-9400 series provides a versatile range from 6 inches to 35 feet along with a more sensitive transducer to detect difficult targets. This sensor is great for non-reflective and/or soft surfaces. With built in technology to compensate for temperature the IRU-9400 is well suited for object detection and is recommended for indoor use.

Features

- Easily configured for obstacle detection applications
- Internal Temperature Compensation
- Works on solids and liquids

IRU-9400 Specifications

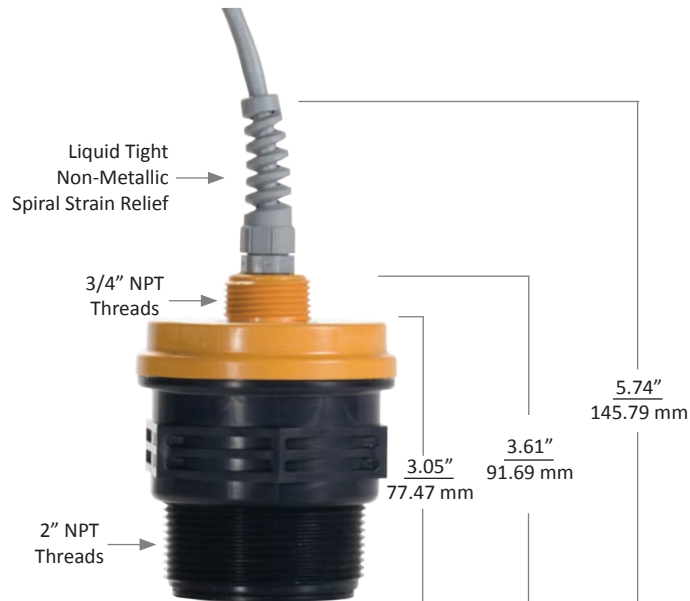

Performance

- Operating Range
0.50 - 35 ft. (0.15 - 10.67 m)
- Beam Pattern: 90° off axis
- Internal Temperature Compensation
- Frequency: 50 kHz
- Accuracy: ±0.25% of detected range
- Resolution: 0.1 in. (2.5 mm)
- Response Time: Programmable (20 ms minimum)

Connectivity

- Output:
- 4-20 mA
 - 4-20 mA with (2) NPN outputs
 - 0-2.5 V/0-5 V (selectable via software)

Environmental

- Ratings: NEMA 12
- Operating Temp: -40° - 140°F (-40° - 60°C)

Electrical

- Total Current Draw: 75 mA @ 24 VDC
- Supply Voltage: 12-28 VDC
- Wiring Connection: 4, 5 or 8 conductor shielded cable

Programming

- Interface with RST-3001 Programmer (purchase separately - not needed for "S" option)
 - The RST-3001 is 32 bit only
 - The RST-3002 is 32 and 64 bit compatible
- User selected units of measure

Physical

- PC/PET upper housing
- PC/PET Blend Transducer

Certification

- CSA General Purpose

