



**Recorder/Controller/Profiler**

**DESCRIPTION**

The MRC7000 Recorder/Controller is a microprocessor based circular chart instrument capable of measuring, displaying, recording and controlling up to two process variables from a variety of inputs.

Record and control functions, alarm settings and other parameters are easily configured via the keys on the front cover and self-prompting displays.

All user entered data can be protected against unauthorized changes via the MRC7000 Enable Mode security system.

**MRC 7000™**

***Proven Recording Reliability that Became the Industry Standard!***

**APPLICATIONS:**

Record, profile and security functionality for reliability in diverse industry applications

- Process Validation
- Trend Analysis
- Regulatory Compliance
- Product Safety
- Temperature
- pH Level

**INDUSTRIES**

Oven, chamber, furnaces, heat treating, food processing, harsh water environments

**FEATURES/BENEFITS**

- Micro-based recording with controller or profiler options with programming setpoint profile capability in one instrument
- Two displays allow you to see critical process values at the same time (on 2 pen units)
- Easy, straightforward programming allows you to configure your recorder with a logical step-by-step process using a simple keypad
- Optional true time based profiling capability puts you in control of your process
- Reliability—maintenance free recording for years to come

## MRC 7000™

Proven Recording Reliability that  
Became the Industry Standard!

Recorder/Controller/Profiler

## SPECIFICATIONS

## STANDARD FEATURES

- Functionality:** Digital; Available in four configurations: Record only, High/Low limit optional, Controlling Recorder, Profiling Controlling Recorder.
- Display:** One digital display (std.); 2nd display with 2 pen (optional); 0.56" high, red, seven segment LED; 3 button keypad; automatic and decimal point positioning. Two alarm indications possible per pen.
- Status Indicators:** 7 LED status indicators – Out 1, 2, Man (Ramp, Soak or Seg 1–6 for profiler option only), one green LED pen 2 indicator, ALRM 1/ALRM 2 with red LEDs.
- Chart:** 10" circular chart; 100 charts furnished with each instrument. Unless otherwise specified, charts shipped with instrument are 0–100 range. 24 hour rotation default setting.
- Chart Drive:** DC Stepper Motor.
- Chart Rotation:** User configurable from 0.1 and 999.9 hours per revolution.
- Chart Range:** Bottom and top of span –9999 to 9999 units.
- Pen Type:** One or two disposable fiber tip pen.
- Pen Color:** Pen 1 (red); Pen 2 (green).
- Memory Backup:** Battery; 5 year normal life.
- Construction/Enclosure:** Structural foam enclosure with plastic cover standard.

## OPERATING CHARACTERISTICS

- Operating Temp:** 32 to 122°F (0 to 50°C).
- Storage Temp:** –40 to 149°F (–40 to 65°C).
- Humidity:** 0% to 90% non-condensing R.H.
- Vibration:** 0.5 to 100 Hz @ 0.2g.
- Electro Static Discharge:** No effect from 5000V static charge over the entire area.
- RFI:** Degradation due to RF fields to recording and output accuracy to 8% at spot frequencies in the range of 100–1000 MHz.



## ELECTRICAL

- Power Consumption:** 25VA max.
- Line Voltage:** 115V or 230VAC ±10%, 50–60Hz.

## OUTPUTS

## CONTROL OUTPUTS:

- Relay:** SPST/SPDT; 115VAC 5.0A Resistive, 1/8HP, 250VA; 230VAC 2.5A Resistive, 1/8HP, 250VA.
- SSR Driver:** Open collector output; short circuit protected @ 100mA max; provides 4VDC @ 20mA or 3VDC @ 40mA.
- Current:** 0–20mA or 4–20mA; 0–650 ohm maximum load.
- ALARM/EVENT OUTPUTS (Options):**
- Relay:** SPST/SPDT; 115VAC 5.0A resistive, 1/8HP, 250VA. 230VAC 2.5A resistive, 1/8HP, 250VA.
- SSR Driver:** Open collector output; short circuit protected @ 100mA max; provides 4VDC @ 20mA or 3VDC @ 40mA.
- Process Alarm:** Direct (High) or Reverse (Low) –9999 to 9999 units.
- Deviation Alarm:** Direct (Deviation above setpoint) or Reverse (Deviation below setpoint) –3000 to 3000 units.
- Deviation Band Alarm:** 1 to 3000 units.
- Alarm Hysteresis:** 0–300 units (width of hysteresis band).

## INPUTS

- Thermocouple:** J, K, T, R, S, B, C, E, N.
- RTD:** 100 ohm platinum; 0.00385 ohms/ohm/°C.
- Volts:** 0–5VDC or 1–5VDC.
- DC Millivolts:** 0–25mV, 0–50mV or 10–50mV.
- DC Milliamps:** 4–20mA or 0–20mA used with appropriate shunt resistor.
- Remote Setpoint Input (optional):** 0–5VDC, 1–5VAC, 0–20mA, 4–20mA (recording controller only); accommodated with an internal 249 ohm jumper selectable shunt resistor.

## PERFORMANCE

## GENERAL:

- Input Measurement Error:** Type J, K, T, E, N, C, T/C and RTD 0.25% of reading plus 1 degree @ 25°C; Type R, S, B, C, T/C 0.25% of span @ 25°C.
- Ambient Temperature Error:** 0.01% of span per degree C deviation from 25°C.
- Cold Junction Compensation Error:** 0.2% @ 25°C.
- Cold Junction Compensation Rejection:** 0.04% deviation from 25°C.
- Common Mode Rejection:** 90dB minimum; 24VAC maximum for RTD input; 115VAC max for other inputs.
- Normal Mode Rejection:** 85dB minimum @ 60Hz or greater.
- Chart Accuracy:** Recording: 0.5% of span. Chart Rotation: 0.5% of rotation time.
- Process Value Output Error Limit:** 0.5% of span.
- Record Error Limit:** 0.5% of chart span or better typically; 0.1% of chart span maximum.
- CONTROL PARAMETERS (optional):**
- Proportional Band Output 1/Output 2:** 1 to 3000 units.
- Manual Reset (Integral):** –1500 to 1500 units.
- Auto Reset (Integral):** 0.0–100.0 repeats/minute.
- Rate Derivative:** 0.0–10.0 minutes.
- Cycle Time Output 1/Output 2:** 1 to 240 seconds.
- Position Proportional Sensitivity:** 0.0–50.0%.
- ON/OFF Hysteresis:** 0–300 units (width of hysteresis band).
- First/Second Output Position:** –1000 to 1000 units.
- Control Action:** Direct or Reverse.
- Automatic Transfer Function:** User-selectable to transfer from manual to automatic control when setpoint is reached; can be disabled.
- Anti-Reset Windup:** Auto-reset is disabled when the process is outside of the proportional band.
- Auto/Manual:** Bumpless transfer.
- Manual Output:** 0–100%.
- Output Limiting:** High/Low 0–100%.
- Setpoint Limiting:** High/Low Limit: –9999 to 9999 units.



MRC 7000™

*Proven Recording Reliability that Became the Industry Standard!*

Recorder/Controller/Profiler

**SPECIFICATIONS (Continued)**

**PERFORMANCE (continued)**

**PROFILE PARAMETERS (optional):**

**Programmable Profiles:** 8 user-programmable profiles.

**Segments:** 1-6 segments per profile.

**Ramp and Soak:** 1 ramp and soak per segment.

**Profile Time Base:** User-selectable; Choose from hours and tenths (HHHT); hours and minutes (HHMM) or minutes and seconds (MMSS).

**Profile Interruption Action:** Upon return of AC power either go to OFF mode, continue profile, go to HOLD mode, or restart profile at beginning.

**Profile Loop Count:** 1-9999; 0= continuous.

**Profile End Control:** User-selectable; hold at last setpoint; Abort (all outputs off or 0%); transfer to another profile.

**Assured Soak:** Deviation Hold after Ramp Up or Down; 1-3000 units; 0= No Auto Hold.

**Pen Profiling Configuration:** Pen 1 only or Pen 1 and 2.

**Remote Run/Hold (optional):** User-selectable; override Run/Hold key; allow Run/Hold key function.

**Event Output(s):** Up to 3 event outputs possible; each event can be set on or off for each ramp and soak.

**COMMUNICATIONS INTERFACES**

**Communications Port:** RS-422/485 serial, half duplex.

**Protocol:** Partlow ASCII

**Bit Rate:** User-configurable 300, 600, 1200, 2400, 4800 or 9600/sec.

**Address:** User-configurable for each pen 0-99.

**RATINGS/AGENCY APPROVALS**

**Safety:** UL 1092 File E67237, CSA Spec C22.2 File LR39885.

**Immunity:** Optional CE compliance.

**Other:** ISO 9002 registered.

**PROTECTION**

NEMA 3 enclosure optional; CE compliance optional.

Enable Mode security system option.

**PHYSICAL DIMENSIONS**

**Width:** 15.13" (384mm).

**Depth:** 3.63" (92mm).

**Height:** 13.19" (335mm).

**Weight:** 20 lbs (9.1kg).

**OPTIONS/ACCESSORIES**

Choice of pen, thermocouple input and SSR driver outputs (see matrix for details).

RS-485 communication option.

24V DC power supply option.

115 or 230VAC input option.

NEMA 3 protection optional; CE compliance optional.

Enable Mode security system option.

**WARRANTY**

3 years.



# Recorders

**PARTLOW™ brand**

**MRC 7000™**

*Proven Recording Reliability that  
Became the Industry Standard!*

**Recorder/Controller/Profiler**

## MODELS (Recorder Only)

Code 1: Model	Code 2: Pen 1	Code 3: Pen 2	Code 4: Relay (SPST) Output*	Code 5: SSR Driver Output*	Code 6: 4-20mA Outputs	Code 7: Transmitter Power Supply	Required Zeros	Code 8: Digital Communications	Code 9: Enclosure Options	Code 10: Operating Voltage	Code 11: Option Suffix
<b>7</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<b>0 0</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
MRC7000 Recorder	1 Recorder Only 4 High or Low Limit†††	0 None 1 Recorder Only	0 None 1 One SPST 2 Two SPST 4 Four SPST 6 Six SPST 7 One SPDT 8 Two SPDT 9 Two SPDT and Two SPST	0 None 1 One 2 Two 4 Four 6 Six 8 Eight	0 None 1 One Standard 2 Two Standard 3 Three Standard 4 Four Standard	0 None 1 24VDC Regulated /Isolated	<b>0 0</b>	0 None 2 RS-485 Total Access	2 Standard Cover (Plastic Windows) 4 Door Lock** 6 Sealed Conduit Connections 7 4 & 6 CorrInlet**	1 115V/AC 2 115/230V/AC <b>CSA APPROVED</b> 4 115V/AC 5 115/230V/AC	<b>BLANK</b> - None N3 NEMA 1 <b>AW</b> RTD Depression on Pen 2 <b>AD</b> 0/100 mV/DC Input <b>AE</b> N3 plus <b>AW</b> <b>CE</b> CE Compliance

\* Total quantity of SPST Relay and SSR Drivers must be less than or equal to eight. When SPDT Relays are included, the total must be less than or equal to six. With Limit, only 1 selectable Alarm is available.

\*\* This option comes with a structural frame cover.

††† - NEMA type protection for wet environments.

NOTE: 4-20mA inputs are accommodated using the 1-5V input and a 250 ohm Shunt Resistor, PN104411701 or the 10-50mA input and a 2.00hm Shunt Resistor, PN104411702  
Order as Separate line item.

†† Highlow limit devices Factory Mutual approved.



**PARTLOW™ brand**

**MRC 7000™**

*Proven Recording Reliability that  
Became the Industry Standard!*

**Recorder/Controller/Profiler**

**MODELS (Recording Controller/Profiler)**

Code 1: Model	Code 2: Pen 1	Code 3: Pen 2	Code 4: Relay (SPST) Outputs*	Code 5: SSR Driver Outputs*	Code 6: 4-20mA Outputs	Code 7: Transmitter Power Supply	Code 8: Pen 1 Auxiliary Input	Code 9: Pen 2 Auxiliary Input	Code 10: Digital Communications	Code 11: Enclosure Options	Code 12: Operating Voltage	Code 13: Option Suffix
<input type="checkbox"/> 7	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
MRC7000 Recording/ Profile Controller	2 Recording Controller 3 Recording Profile Controller	0 None 1 Recorder Only 2 Recording Controller	0 None 1 One SPST 2 Two SPST 4 Four SPST 6 Six SPST 7 One SPDT 8 Two SPDT 9 Two SPDT and Two SPST	0 None 1 One 2 Two 4 Four 6 Six 8 Eight	0 None 1 One Standard 2 Two Standard 3 Three Standard 4 Four Standard	0 None 1 24VDC Regulated /Isolated	0 None 1 Position Proportional 2 Remote Setpoint 3 Remote Run/Hold**	0 None 1 Position Proportional 2 Remote Setpoint	0 None 2 RS-485 Total Access	2 Standard Over (Plastic Windows) 4 Door Lock*** 6 Sealed Conduit Connections 7 4 & 6 Combined**	1 115VAC 2 115/230VAC <b>CSA APPROVED</b>	BLANK - Ione N3 NEMA-1 AW RTD Depression on Pa 2 AD 0/10C mVDC Input AE N3 plus AW CE CE Compliance

\* Total quantity of SPST Relays and SSR Drivers must be less than or equal to eight. When SPDT Relays are included, the total must be less than or equal to six.

\*\* Applies to Model 73000000000000000000

\*\*\* This option comes with a structural foam cover.

IN3 - NEMA type protection for wet environments

**NOTE:** 4-20mA inputs are accommodated using the 1-5V input and a 250 ohm Shunt Resistor, PIN 64411701 or the 10-50mA input and a 2.5 ohm Shunt Resistor, PIN 64411702a

Order as Separate Line Item

**Recorders**







**PARTLOW™ brand**

**MRC 7000™**

*Proven Recording Reliability that Became the Industry Standard!*

**Recorder/Controller/Profiler**

**DIMENSIONS**

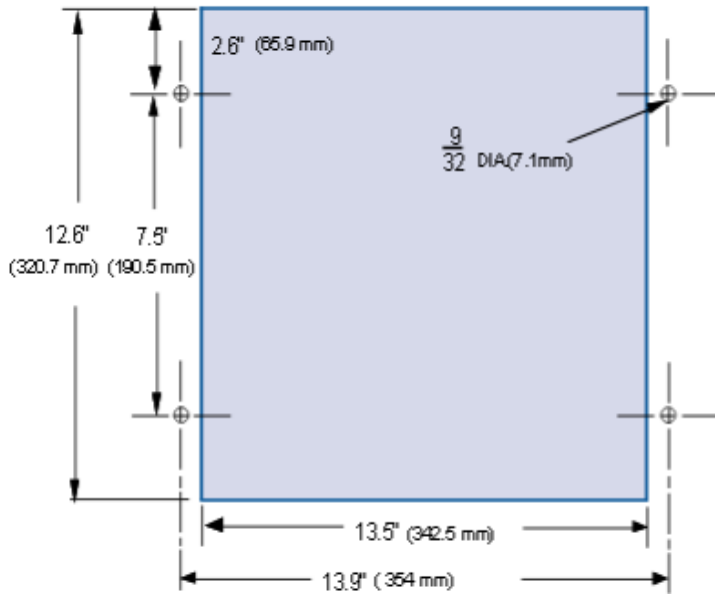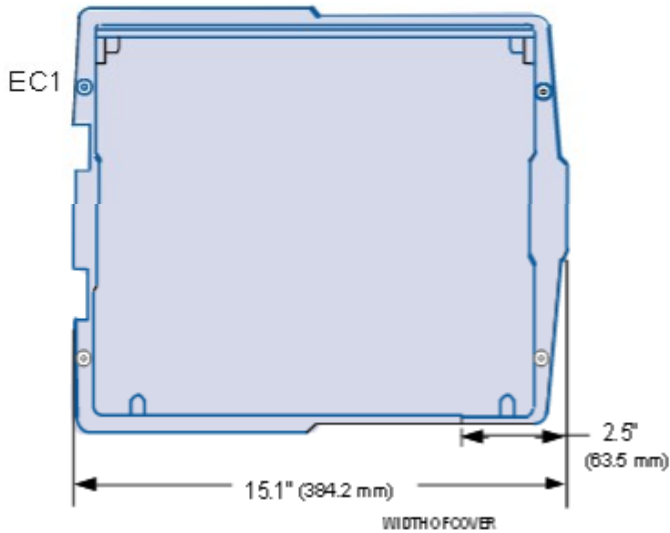

Panel cut-out for flush mounting

Made in USA.

\* Specifications subject to change without notice in accordance with our DBS policy of continuous improvement. All product and brand names are trademarks of their respective companies. All rights reserved.

Partlow™ brand and MRC 7000™ are trademarks of Danaher Industrial Controls Group. All rights reserved.