


EXTENDED RANGE PROXIMITY SENSORS

**HTM**<sup>TM</sup>  
**SENSORS**



- EXTENDED RANGE SENSORS FOR AUTOMATED MACHINERY
- DOUBLE THE RANGE OF STANDARD SENSORS FOR RELIABLE DETECTION
- TIGHT HYSTERESIS FOR A REPEATABLE SENSING RANGE
- HIGH-TORQUE BARREL IS EXTRA THICK FOR MORE DURABILITY
- WRENCH FLATS AND 4-VIEW LED FOR EASY INSTALLATION
- IDEAL FOR USE IN ALL TYPES OF MACHINES FOR PART DETECTION

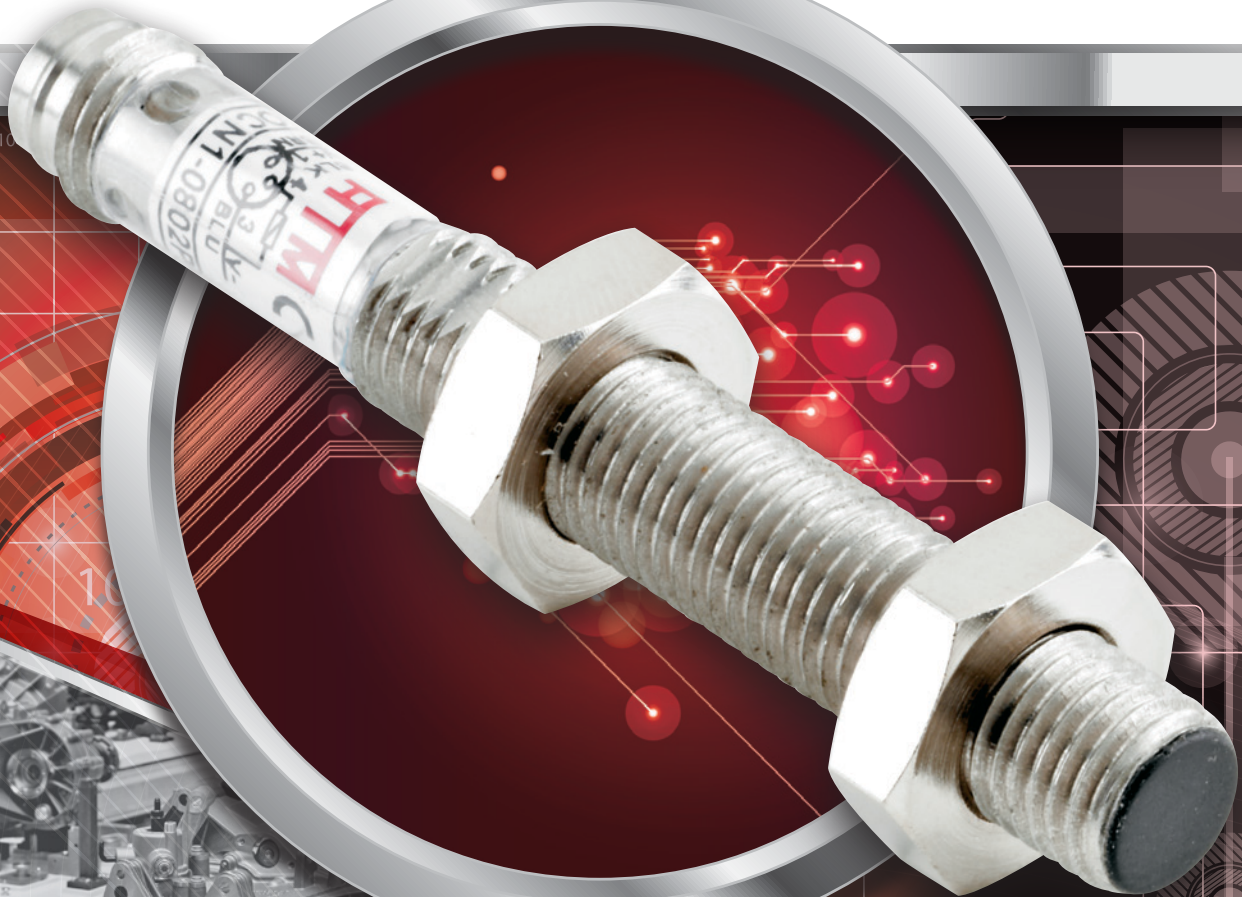


HTMSENSORS.COM

# EXTENDED RANGE PROXIMITY SENSORS SPECIFICATIONS



SENSING DISTANCE	2 mm	2 mm	4 mm	8 mm	15 mm
OPERATING VOLTAGE	10-30 VDC				
OPERATING TEMPERATURE	-25°C - +70°C				
HOUSING MATERIAL	Stainless Steel	Chrome Plated Brass			
<b>PART NUMBERS</b>					
DC 3 wire 10-30V PNP - Open	OCN1-0802P-ACL3	OCN1-0802P-ARL4	OCN1-1204P-ARL4	OCN1-1808P-ARL4	OCN1-3015P-ARL4
DC 3 wire 10-30V PNP - Closed	OCN1-0802P-BCL3	OCN1-0802P-BRL4	OCN1-1204P-BRL4	OCN1-1808P-BRL4	OCN1-3015P-BRL4
DC 3 wire 10-30V NPN - Open	OCN1-0802N-ACL3	OCN1-0802N-ARL4	OCN1-1204N-ARL4	OCN1-1808N-ARL4	OCN1-3015N-ARL4
DC 3 wire 10-30V NPN - Closed	OCN1-0802N-BCL3	OCN1-0802N-BRL4	OCN1-1204N-BRL4	OCN1-1808N-BRL4	OCN1-3015N-BRL4
DC 2-wire 10-30V - Open	OCN1-0802C-ACL3	OCN1-0802C-ARL4	OCN1-1204C-ARL4	OCN1-1808C-ARL4	OCN1-3015C-ARL4
DC 2-wire 10-30V - Closed	OCN1-0802C-BCL3	OCN1-0802C-BRL4	OCN1-1204C-BRL4	OCN1-1808C-BRL4	OCN1-3015C-BRL4

EXTENDED RANGE SENSORS ARE THE BEST VALUE IN THE SENSOR LINE UP WITH GREAT PERFORMANCE FEATURES, EXTENDED RANGE, MORE DURABILITY AND A LOW PRICE FOR ALL APPLICATIONS.



In Canada: 3419 Mainway, Burlington, ON L7M 1A9  
 In the USA: 1889 Maryland Ave., Niagara Falls, NY 14304  
 Toll Free: 1-800-644-1756  
 service@htmsensors.com

Proudly Supported by

