

LONG RANGE PROXIMITY SENSORS

HTMTM
SENSORS



- LONG RANGE SENSORS FOR AUTOMATED MACHINERY
- UP TO 3 TIMES THE STANDARD RANGE FOR RELIABLE DETECTION
- ALLOWS THE SENSOR TO BE MOUNTED FURTHER AWAY TO AVOID CONTACT
- GREAT FOR ANGLED PARTS WHERE THE TARGET CAN BE A VARIABLE DISTANCE
- AVAILABLE WITH A PRE-WIRED CABLE, PIGTAIL, OR QUICK-CONNECTOR
- IDEAL FOR USE IN MACHINES WHERE THE TARGET IS FURTHER AWAY



LONG RANGE PROXIMITY SENSORS SPECIFICATIONS




SENSING DISTANCE	3 mm	3 mm	6 mm	12 mm	22 mm
OPERATING VOLTAGE	10-30 VDC				
OPERATING TEMPERATURE	-25 °C - +70 °C				
HOUSING MATERIAL	Stainless Steel		Chrome Plated Brass		
Shielded					
DC 3-wire 10-30 V PNP - Open	LCN1-0803P-ACL3	LCN1-0803P-ARL4	LCN1-1206P-ARL4	LCN1-1812P-ARL4	LCN1-3022P-ARL4
DC 3-wire 10-30 V PNP - Closed	LCN1-0803P-BCL3	LCN1-0803P-BRL4	LCN1-1206P-BRL4	LCN1-1812P-BRL4	LCN1-3022P-BRL4
DC 3-wire 10-30 V NPN - Open	LCN1-0803N-ACL3	LCN1-0803N-ARL4	LCN1-1206N-ARL4	LCN1-1812N-ARL4	LCN1-3022N-ARL4
DC 3-wire 10-30 V NPN - Closed	LCN1-0803N-BCL3	LCN1-0803N-BRL4	LCN1-1206N-BRL4	LCN1-1812N-BRL4	LCN1-3022N-BRL4
Quasi Shielded Sensing Range	4 mm	4 mm	8 mm	16 mm	25 mm
DC 3-wire 10-30 V PNP - Open	LCN1-0804P-ACL3	LCN1-0804P-ARL4	LCN1-1208P-ARL4	LCN1-1816P-ARL4	LCN1-3025P-ARL4
DC 3-wire 10-30 V NPN - Open	LCN1-0804N-ACL3	LCN1-0804N-ARL4	LCN1-1208N-ARL4	LCN1-1816N-ARL4	LCN1-3025N-ARL4

LONG RANGE PROXIMITY SENSORS ARE THE BEST CHOICE FOR AUTOMATED MACHINERY WHERE A LONGER RANGE IS REQUIRED FOR REPEATABLE OPERATION, AND WHERE CONTACT NEEDS TO BE AVOIDED FROM PARTS OR TOOLING.



In Canada: 3419 Mainway, Burlington, ON L7M 1A9
 In the USA: 1889 Maryland Ave., Niagara Falls, NY 14304
 Toll Free: 1-800-644-1756
 service@htmsensors.com

Proudly Supported by

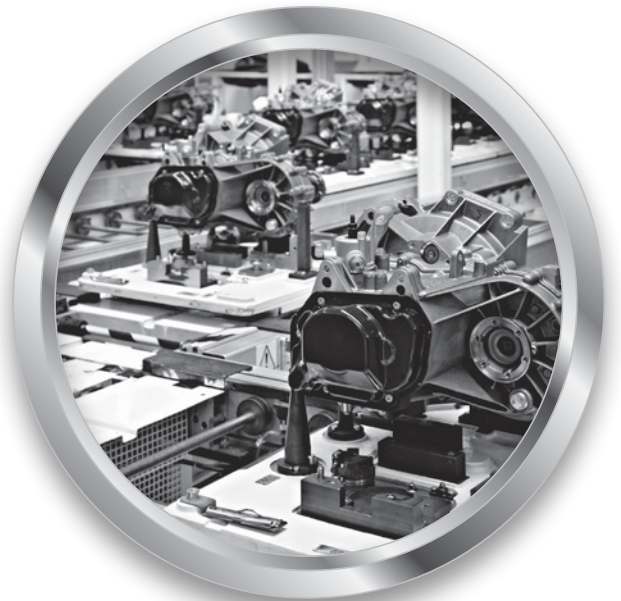

TOLL FREE: 1-800-644-1756