


HTMTM
SENSORS



- PNEUMATIC CYLINDER SENSORS FOR THE RELIABLE CONTROL OF PNEUMATIC ACTUATORS
- SLIM FIT PLASTIC HOUSINGS FOR EASY MOUNTING, OR RUGGED METAL HOUSINGS FOR TOUGH APPLICATIONS
- MOUNTING FOR POPULAR ACTUATOR PROFILES INCLUDING T-SLOT, C-SLOT, DOVETAIL AND TUBULAR
- DROP-IN REPLACEMENTS FOR POPULAR FESTO® STYLE, SMC® STYLE, NUMATICS® STYLE AND CANFIELD® STYLE
- AVAILABLE WITH M8 OR M12 PIGTAIL CONNECTORS, OR WITH PRE-WIRED CABLES
- AVAILABLE WITH PNP, NPN OR REED OUTPUT

PNEUMATIC CYLINDER SENSORS SPECIFICATIONS

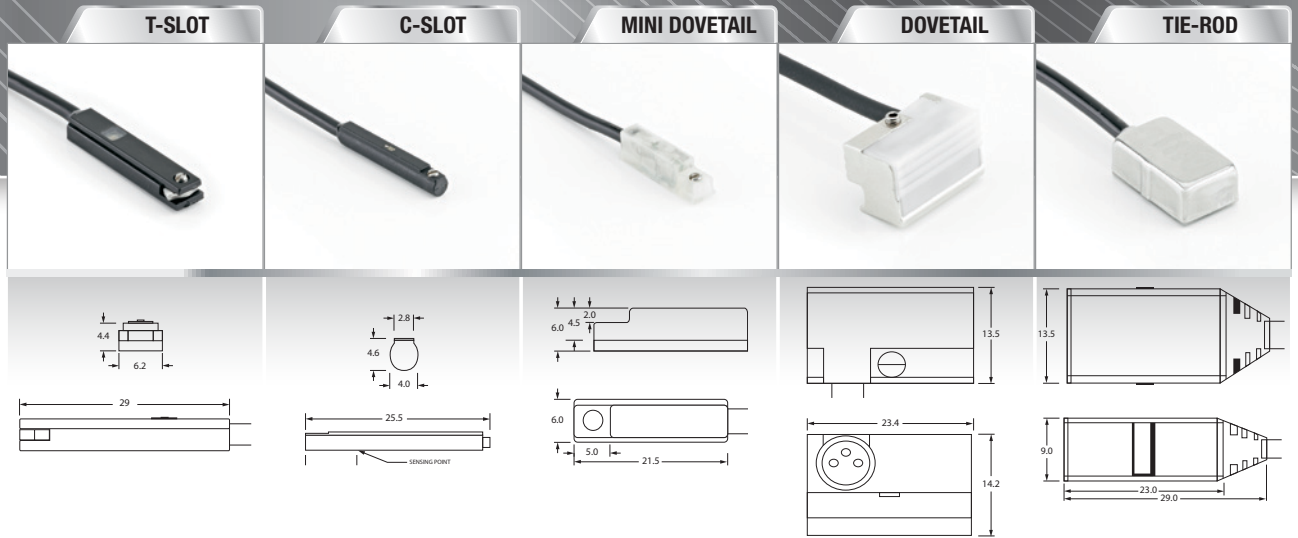

DIMENSIONS (mm)	6.2 W x 4.4 H x 29 L	4 W x 4.6 H x 25.5 L	6 W x 6 H x 21.5 L	11 W x 14 H x 23.4 L	13.5 W x 9 H x 23 L
SWITCHING VOLTAGE - PNP/NPN	5-28 VDC	5-28 VDC	5-28 VDC	5-28 VDC	6-24 VDC
SWITCHING VOLTAGE - REED	5-120 VAC/DC	5-120 VAC/DC	5-120 VAC/DC	5-120 VAC/DC	5-120 VAC/DC
CONNECTION	0.3 m PIGTAIL	0.3 m PIGTAIL	0.3 m PIGTAIL	0.3 m PIGTAIL	0.3 m PIGTAIL
CONNECTOR	M8 3-PIN CONNECTOR	M8 3-PIN CONNECTOR	M8 3-PIN CONNECTOR	M8 3-PIN CONNECTOR	M8 3-PIN CONNECTOR
PART NUMBERS					
PNP VERSION	PCST-06/29P-A3U0.3/P8	PCSC-04/25P-A3U0.3/P8	PCSD-06/21P-A3U0.3/P8	PSCH-11/23P-A3U0.3/P8	PSCR-13/23P-A3U0.3/P8
NPN VERSION	PCST-06/29N-A3U0.3/P8	PCSC-04/25N-A3U0.3/P8	PCSD-06/21N-A3U0.3/P8	PSCH-11/23N-A3U0.3/P8	PSCR-13/23N-A3U0.3/P8
REED VERSION	PCST-06/29R-A3U0.3/P8	PCSC-04/25R-A3U0.3/P8	PCSD-06/21R-A3U0.3/P8	PSCH-11/23R-A3U0.3/P8	PSCR-13/23R-A3U0.3/P8
MATING CABLE	C-FS3TZ-V075	C-FS3TZ-V075	C-FS3TZ-V075	C-FS3TZ-V075	C-FS3TZ-V075

HTM PNEUMATIC CYLINDER SENSORS ARE THE BEST CHOICE FOR THE MOTION CONTROL OF PNEUMATIC ACTUATORS FOR LINEAR, ROTARY OR GRIPPER CONTROL, WHERE A RELIABLE AND INEXPENSIVE SENSOR IS REQUIRED.



In Canada: 3419 Mainway, Burlington, ON L7M 1A9
 In the USA: 1889 Maryland Ave., Niagara Falls, NY 14304
 Toll Free: 1-800-644-1756
 service@htmsensors.com

Proudly Supported by



TOLL FREE: 1-800-644-1756