
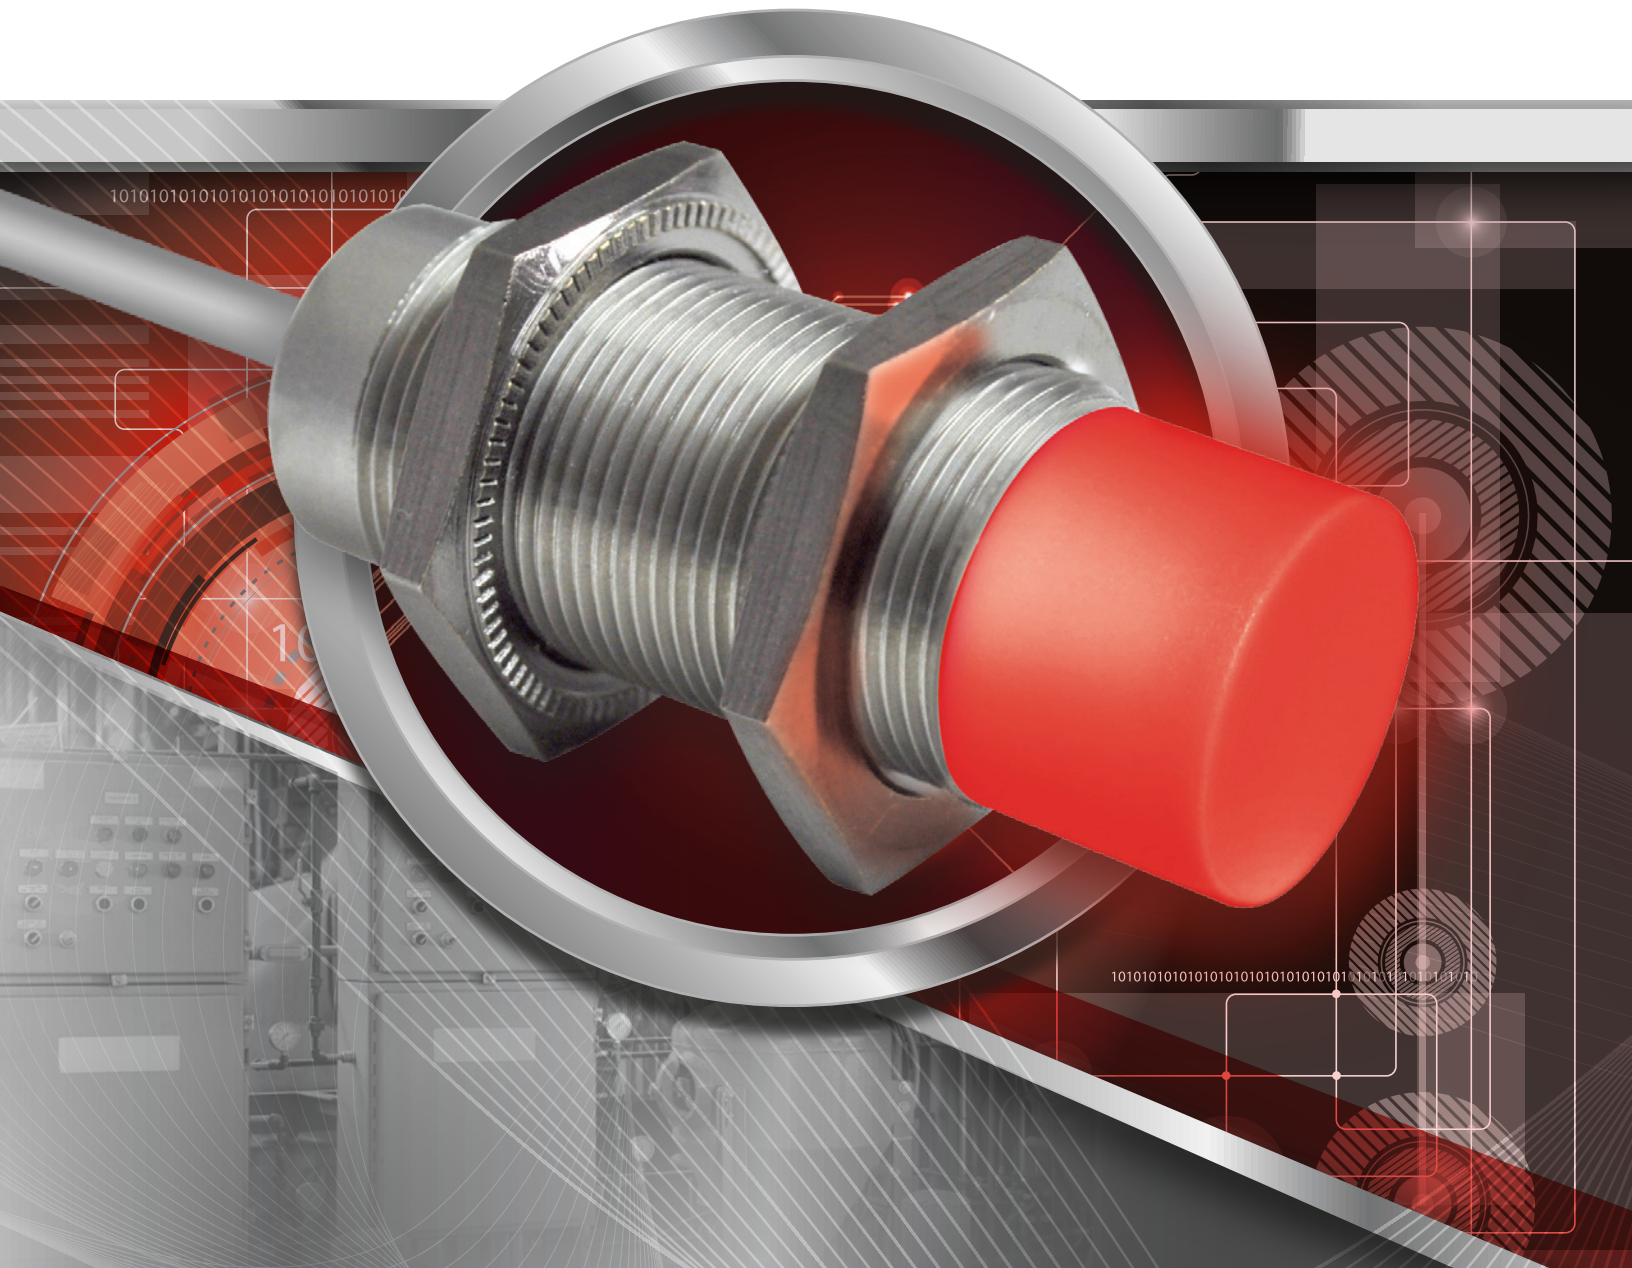




PROX STYLE MULTI-COLORED  
LED INDICATORS

**HTM**<sup>TM</sup>  
SENSORS



- EASY INSTALLATION AND WIRING
- 1 DEVICE - 3 COLORS (RGB OR RGY)
- 100% WATER AND OIL TIGHT - IP67
- SHOCK RESISTANT - COMPLETELY SEALED
- FITS INTO STANDARD  $\varnothing$  22.5 mm MOUNTING HOLES

# PROX STYLE MULTI-COLORED LED INDICATORS SPECIFICATIONS

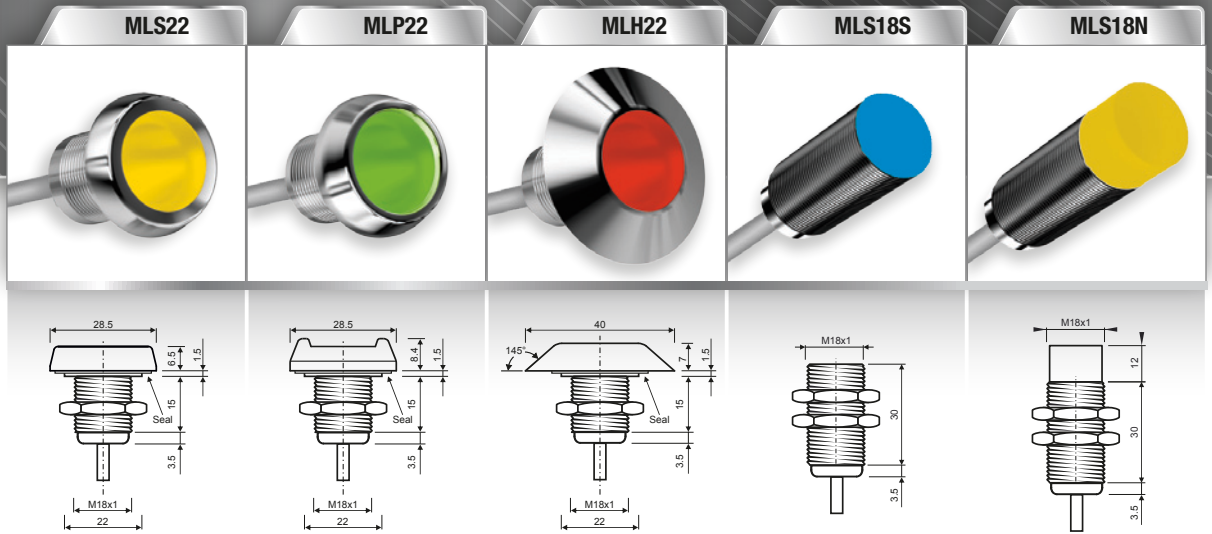


OPERATING VOLTAGE	10-30 VDC					
OPERATING TEMPERATURE	-40 °C - +50 °C					
HOUSING MATERIAL	Stainless Steel '1.4305'					
SENSING FACE MATERIAL	Polycarbonate					
REVERSE POLARITY PROTECTION	Built-in					
CURRENT CONSUMPTION	<35 mA @ 30 V DC					
INDICATOR TYPE	High Efficiency LED					
INGRESS PROTECTION CLASS (FRONT)	IP 67					
MECHANICAL PROTECTION CLASS (FRONT)	IK 10					
INGRESS PROTECTION CLASS (BACK)	IP 67					
PART NUMBERS						
30 cm Pigtail, M12, 4-pin	R G B	SL-S22-RGB-QD	SL-R22-RGB-QD	SL-H22-RGB-QD	SL-18S-RGB-QD	SL-18N-RGB-QD
	R G Y	SL-S22-RGY-QD	SL-R22-RGY-QD	SL-H22-RGY-QD	SL-18S-RGY-QD	SL-18N-RGY-QD
2 m Pre-wired	R G B	SL-S22-RGB-PW	SL-R22-RGB-PW	SL-H22-RGB-PW	SL-18S-RGB-PW	SL-18N-RGB-PW
	R G Y	SL-S22-RGY-PW	SL-R22-RGY-PW	SL-H22-RGY-PW	SL-18S-RGY-PW	SL-18N-RGY-PW

PROX STYLE LED INDICATORS OFFER THE SPEED OF INSTALLATION AND EASY WIRING OF A PROXIMITY SENSOR, WITH BRIGHT AND LONG LASTING LED'S.



In Canada: 3419 Mainway, Burlington, ON L7M 1A9  
 In the USA: 1889 Maryland Ave., Niagara Falls, NY 14304  
 Toll Free: 1-800-644-1756  
 service@htmsensors.com

Proudly Supported by

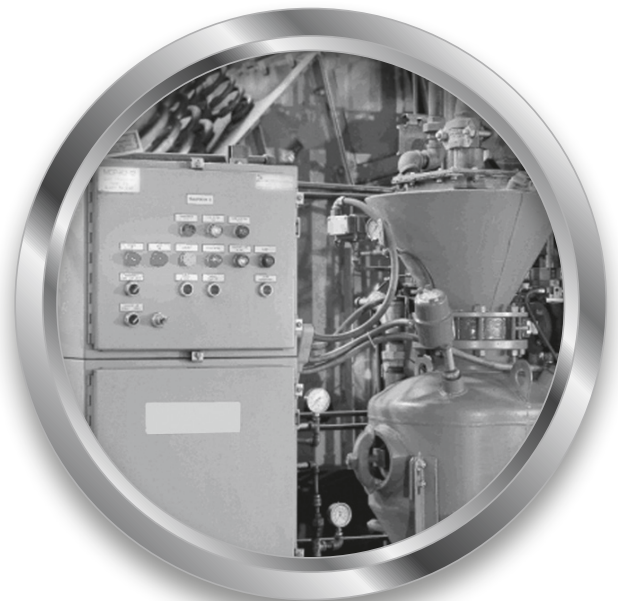

TOLL FREE: 1-800-644-1756