


**HTM**<sup>TM</sup>  
**SENSORS**



- QUICK-CONNECT SENSOR CABLES FOR SENSOR CONNECTIONS
- LOW PRICES WITH THOUSANDS IN STOCK FOR SAME-DAY SHIPPING
- AVAILABLE IN LOW-COST PVC, OIL-RESISTANT PUR, AND SPATTER RESISTANT TPE
- AVAILABLE IN YELLOW, BLACK OR GREY OR CUSTOM COLORS
- AVAILABLE IN STANDARD 5 m LENGTH, OR ANY CUSTOM LENGTH
- ANY STYLE AVAILABLE WITH PRE-INSTALLED PROTECTIVE SILICONE JACKET

## QUICK-CONNECT SENSOR CABLES - M8 SPECIFICATIONS

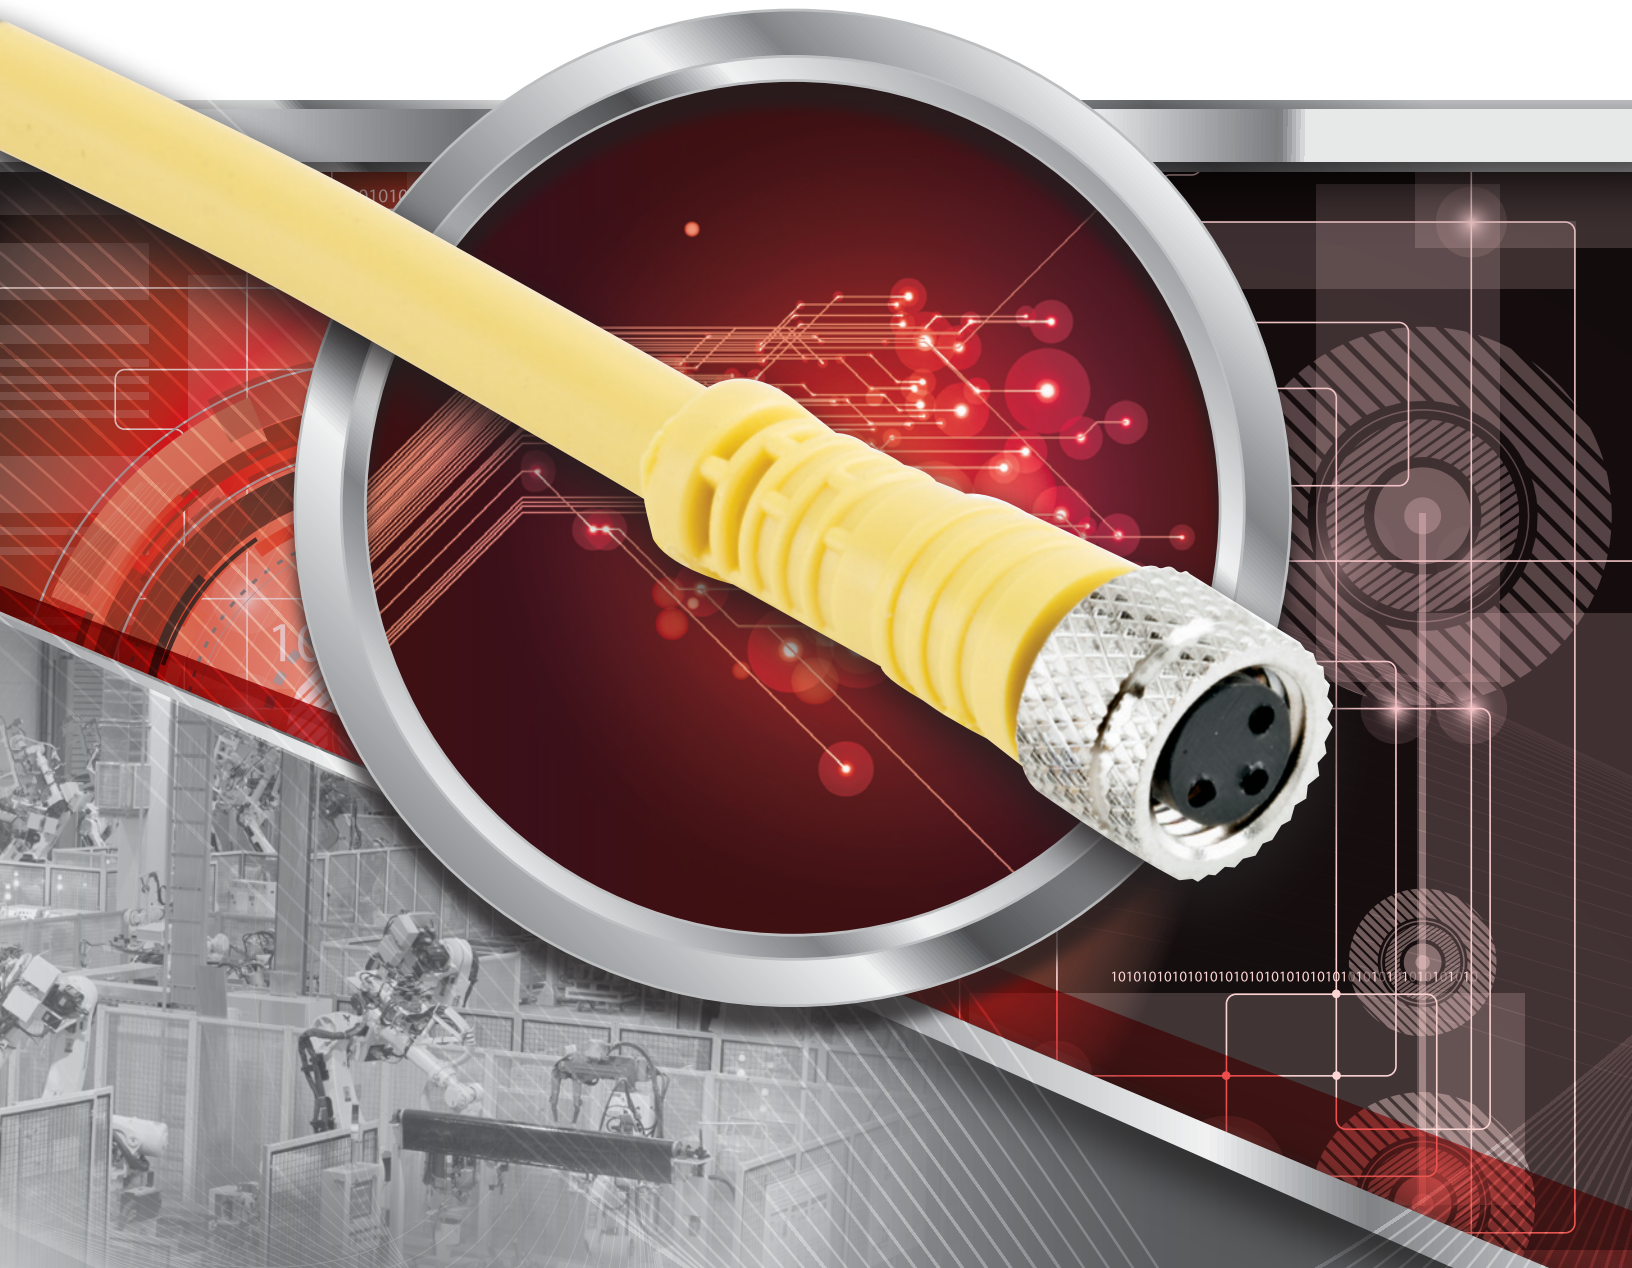

Connection	M8 PVC		M8 PUR		M8 TPE	
	Straight	Angled	Straight	Angled	Straight	Angled
Connector						
Cable Material	Low-Cost PVC		Oil-Resistant PUR		Weld Spatter Resistant TPE	
Wire Gauge	4x22 AWG					
Threaded Connector	Nickel-plated Brass				PTFE Coated Brass	
Nominal Voltage	250 V AC/300 V DC (10-30 V DC LED models)					
Protection	IP67					
3-pin / 3-wire	C-FS3TZ-V075	C-FA3TZ-V075	C-FS3TZ-Y075	C-FA3TZ-Y075	C-FS3TZ-T075	C-FA3TZ-T075
3-pin / 3-wire - PNP LED		C-FA3TP-V075	C-FA3TP-Y075		C-FA3TP-T075	R-FA4/3TP-T075
3-pin / 3-wire - NPN LED		C-FA3TN-V075	C-FA3TN-Y075		C-FA3TN-T075	R-FA4/3TN-T075
4-pin / 4-wire	C-FS4TZ-V075	C-FA4TZ-V075	C-FS4TZ-Y075	C-FA4TZ-Y075	C-FS4TZ-T075	C-FA4TZ-T075
For Food Grade Stainless Steel Nuts	Add -SS on the end of the part #					
For Weld Grade PTFE Coated Nuts	Add -PTFE on the end of the part #					
For 18AWG wires	Add -18AWG on the end of the part #					
For Factory Pre-Installed Silicone Sleeve	Add -S on the end of the part #					
For custom lengths	Change "5" on the end of the part # to the desired length in meters					
For male connectors	Change "F" in the part # to "M"					
For custom colors	Add -Black, -Grey, -Yellow, or -Orange to the end of the part #					

QUICK-CONNECT SENSOR CABLES HAVE A LOW PRICE,  
AND THOUSANDS IN STOCK FOR SAME DAY SHIPPING.



In Canada: 3419 Mainway, Burlington, ON L7M 1A9  
In the USA: 1889 Maryland Ave., Niagara Falls, NY 14304  
Toll Free: 1-800-644-1756  
service@htmsensors.com

Proudly Supported by



**TOLL FREE: 1-800-644-1756**