

- SILICONE TUBING FOR SENSOR AND SENSOR CABLE PROTECTION
- TEMPERATURE RATED TO 500 °F/260 °C
- AVAILABLE FROM 3/8" TO 1" INSIDE DIAMETER
- CLEAR SILICONE TO MAINTAIN VISIBILITY TO CABLES AND SENSORS
- IDEAL FOR PROTECTION FROM HEAT, CUTS AND WELD SPATTER
- AVAILABLE PRE-INSTALLED ON SENSORS AND CABLE PRODUCTS

# SILICONE WELD SPATTER PROTECTION SPECIFICATIONS



	HSCP-0375	HSCP-0500	HSCP-0750	HSCP-1000	Silicone Tape
Inside Diameter	3/8"	1/2"	3/4"	1"	1" wide
Outside Diameter	1/2"	5/8"	7/8"	1-1/8"	
<b>Temperature Rating</b>	<b>500 °F / 260 °C</b>				
Length	100 foot roll	50 foot roll	50 foot roll	50 foot roll	36 foot roll




CLEAR SILICONE TUBING AND SELF-FUSING SILICONE TAPE ARE PROVEN TO REDUCE DOWNTIME IN WELD CELLS BY PROTECTING CABLES, CONNECTORS AND SENSORS.



In Canada: 3419 Mainway, Burlington, ON L7M 1A9  
 In the USA: 1889 Maryland Ave., Niagara Falls, NY 14304  
 Toll Free: 1-800-644-1756  
 service@htmsensors.com

Proudly Supported by

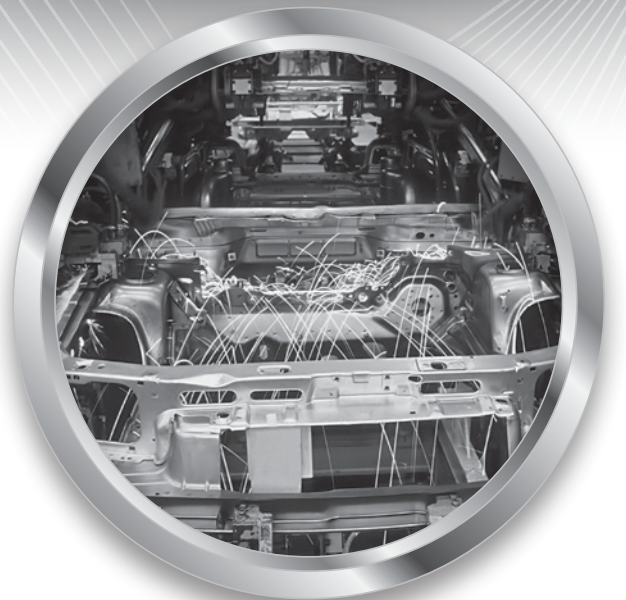

TOLL FREE: 1-800-644-1756